









Series E930 Sliding Rollers

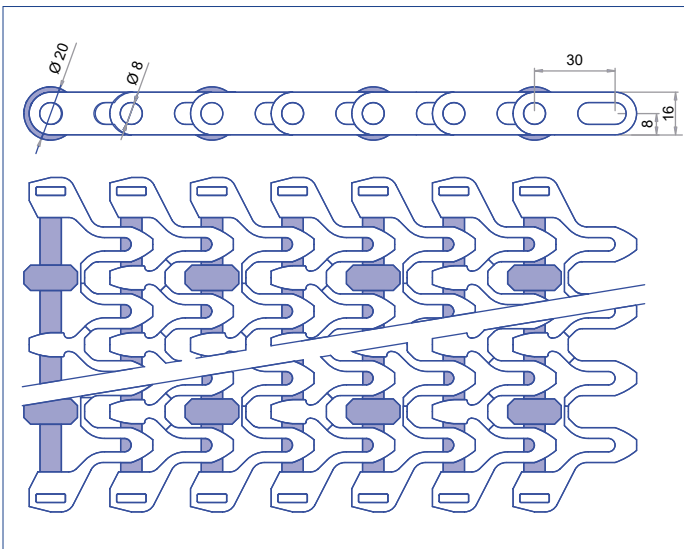

	Belt pitch	30 mm
	Belt width	Multiples of 25 mm
	Rod diameter	8 mm
	Drive system	Hinge
	Ø min direct rotation roller	40 mm
	Ø min reverse rotation roller	150 mm

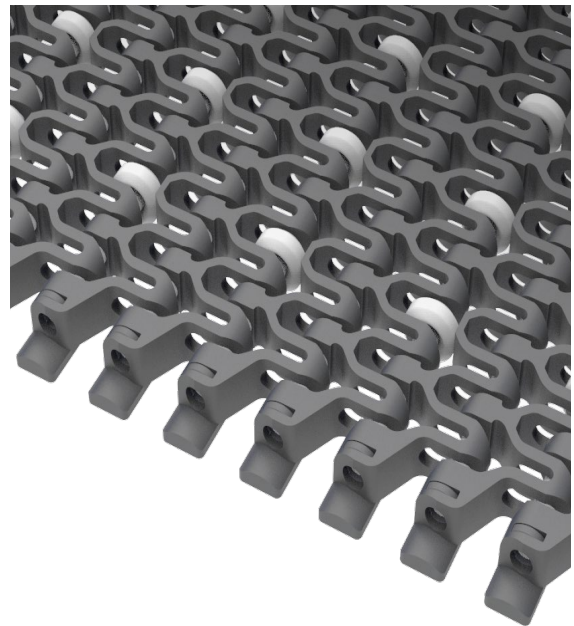

This series is designed to be able to work simultaneously in straight and curved conveyors.

With a pitch of 30 mm and an open surface of 47%, they make it ideal for all types of applications that require large drainage or air flow passage through, such as cooling lines.

With a clamping rod diameter of 8 mm and a locking clip retention, it ensures smooth operation under high loads.

Belt surface	Belt material	Rod material	Belt resistance		Belt weight (kg/m ²)	Temperature limit (C°)	Standard Colours ¹	Open Area + opening dimensions	Belt thickness	Retention system
			Straight (kg/m)	Curve (kg)						
Sliding rollers	PP-Polypropylene	POM - Acetal	Consult	Consult	Consult	+1 to +90	W - G	Consult	20 mm	Clip
	POM - Acetal						B - N			

¹W = White G = Grey N = Natural B = Blue O = Black

Special qualities


	Indent (mm)	Sliding rollers width	Sliding rollers material	Sliding rollers diameter	Spaces between sliding rollers
Sliding rollers	37,5 - 62,5 - 87,5	10 mm	Acetal	20 mm	Multiples of 30 mm

Accessories **E930** Sprockets

We also have sprockets to be used with motor drum in applications needing a special cleaning or in conveyors in which it is not possible to place the motor in the outside due to problems of space or safety.


N° teeth Z	Ø Pitch	Bore for square shaft		Hub width
		mm	inch	
11	106,5	40	1,5	25
16	153,5	40-60	1,5	25
20	191,5	40-60	1,5	25

*Consult the technical department for the availability of split sprocket or machined sprocket with different numbers of teeth.

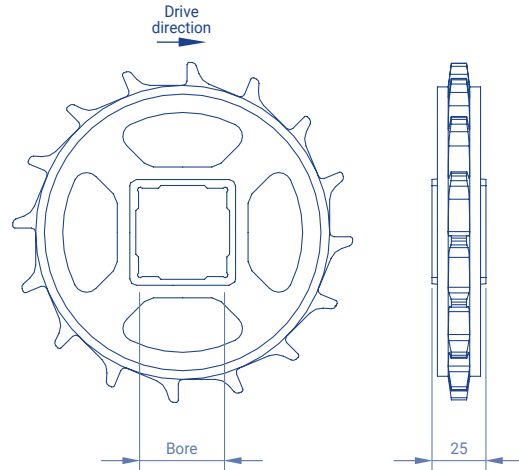


It is manufactured in polypropylene, polyacetal and stainless steel

**check availability in other materials*



WITH KEYWAY



WITHOUT KEYWAY

Accessories **E930** Hold-down profiles and Flights

Accessories	Dimensions	Materials
Profiles in L	40 x 20 x 2000	Polyethylene
Profiles in U	20 x 14 x 2000	Polyethylene
Straight flight (streamline + no cling)	Height (h) 25 - 50	Polypropylene Acetal

